


FINO®



Product Sheet

FINO is a leader in innovation and engineering with superior quality in performance and design. With the thinnest profile of any Muraflex partition, single, double, and curved glazing, and a stunning range of customization options, FINO is a powerful aesthetic choice. Between FINO's perfectly aligned profiles and the ingeniously concealed mechanisms, FINO boasts sleek and refined.

Extrusions

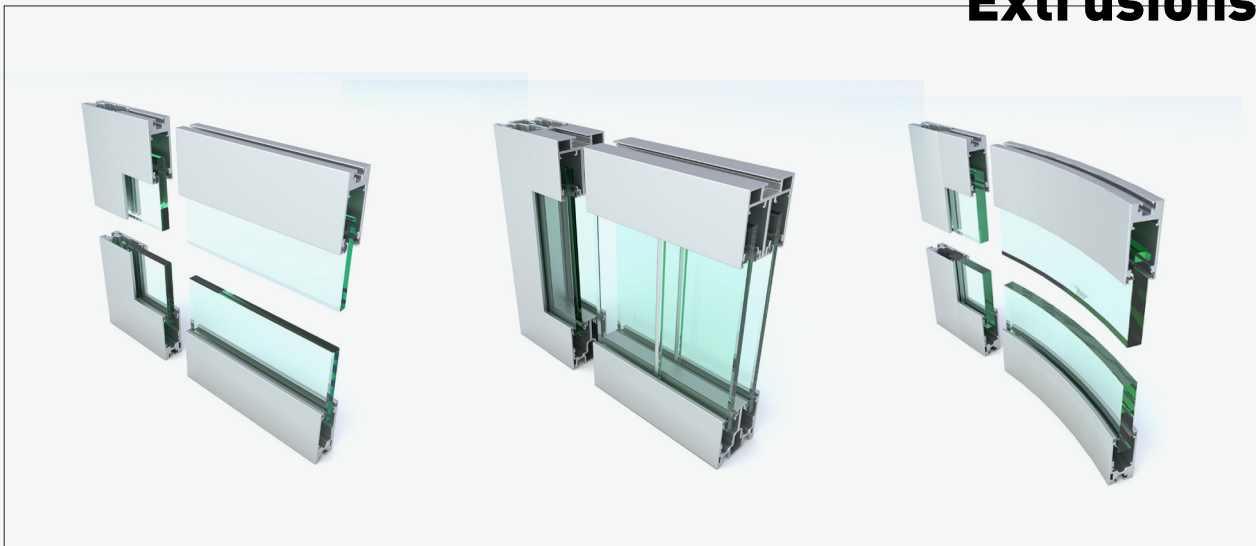

Glazing and Panels:

Simple, double, simple curved, and double curved
Thickness: 1/2" and 3/8"
Tempered, laminated, low iron (extra clear), and speciality glass

Profile:

Stick built
Profile dimensions:

- Single glazed top and bottom extrusion: W1" x H2-3/8"
- Double glazed top and bottom extrusion: W2-3/8" x H2-3/8"
- Single glazed mini sill extrusion: W1" x H1-11/16"
- Smallest radius on curved glazing: 12"
- Sliding single or double glazed door adds W1-3/4"

Aluminum
Applied and integrated mullions available
Aluminum and wood flyby available

Doors:

Framed

- Standard Muraflex single pivot door
- Standard Muraflex double glazed pivot door
- Standard Muraflex single sliding door
- Standard Muraflex double glazed sliding door

Wood

- Pivot door
- Sliding door

Standard door hardware

- Lever or ladder pull
- Locking or non-locking
- Drop seal available on framed doors and wood sliding door
- Hold open available on all swing doors
- Soft open/close available on all sliding doors

Maximum door height: 10'

Tolerance:

Total of 1-1/4"

Junctions:

Available in polycarbonate
Glass to glass, corner (L), and T condition

Gaskets:

Door: available in black, white, and clear
Wall: available in black, white, and grey

Ceiling Condition:

Installed on a bulk ceiling
Maximum height of 10'

Acoustical properties:

Single glazed tested STC assembly score ranges (depending on options): 34 - 38
Double glazed tested STC assembly score ranges (depending on options): 43 - 46

Integrated electrical components:

High and low voltage wiring
Integrated electrical components including room scheduler, card reader, and electrical strike available
Panic hardware available

Lead times:

12-14 weeks
16+ weeks on custom system



Sustainability

At Muraflex, we are dedicated to diminishing our impact on the environment. We are also committed to continually improving our procedures in terms of product development, supply, packaging and distribution in an effort to minimize our environmental footprint.



Declare.





The Finishes

Black Anodized G2	Architectural Bronze Anodized G2	Medium Bronze Anodized G2	Champagne Anodized G2	Clear Anodized G1	
Black Powder coat G2	Charcoal Powder Coat G2	Grey Powder Coat G2	Champagne Powder Coat G2	White Powder Coat G2	Custom Powder Coat G2
Polished Anodized G3	Brushed Black Anodized G3	Brushed Clear Anodized G3	Wenge T2 Wood Veneer G4	Walnut T2 Wood Veneer G4	White Oak T2 Wood Veneer G4

Due to variances in screen calibration or print quality, finish images may not accurately represent the actual color sample.